


# PTS PRECISION TEST SYSTEMS

## PTS50-15 15 MHz Distribution Amplifier

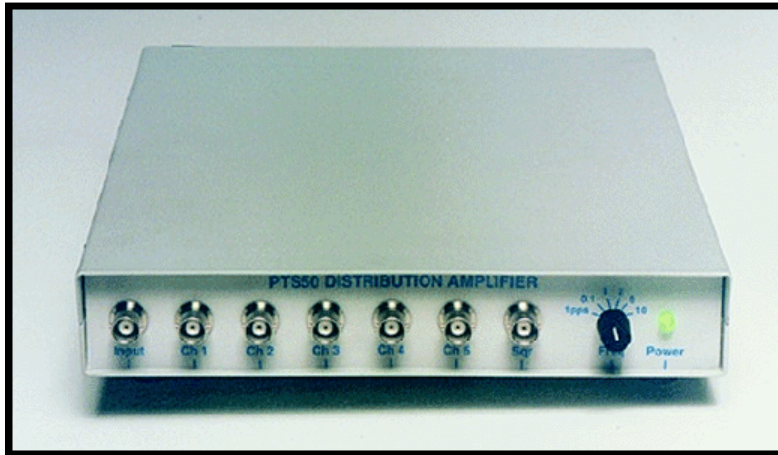

### Key Features

- 15 MHz Input
- AGC Controlled
- 5 Sinewave Outputs
- 1 Squarewave Output
- Slave Output
- Low Phase Noise
- High Isolation
- MTBF over 30 years
- AC or DC power
- CE Marked

### General Description

The PTS50-15 can be used to synchronize up to six instruments to a 15 MHz reference input. The PTS50-15 incorporates AGC (automatic gain control) so that a 15 MHz input can be varied from -10 dBm to +20 dBm without the outputs changing by more than 0.4 dB. Inputs as low as -30 dBm still produce a useable output. The pure sinewave output (harmonics are 70 dB down) enables the PTS50-15 to work in the most demanding applications. The output frequency accuracy is exactly the same as the input frequency accuracy.

### Outputs

There are five, 15 MHz, sinewave outputs. Each 15 MHz output is isolated from the input and each other. Therefore the reference oscillator connected to the PTS50-15 input is protected against load variations, short circuits etc. that may be applied to the outputs.

A sixth squarewave output can be switched in frequency from 15 MHz, 7.5 MHz, 3 MHz, 1.5 MHz, 150 kHz and 1.5 Hz. This output is ideal for instruments that do not use a 15 MHz timebase. A rear slave output can be connected to a second PTS50-15 (or more) to give up to twelve outputs (or more). See "Applications" below.

### Applications

The PTS50-15 15 MHz Distribution Amplifier is ideal for use in calibration or standard laboratories, radio repair workshops or production facilities. By using the rear slave output, many PTS50-15's can be connected together to give multiple outputs

### Miscellaneous Information

The PTS50-15 is a highly reliable unit with a MTBF (based on real data) of over 30 years. The PTS50-15 is housed in a fully screened steel case and operates from a 115 VAC or 230 VAC supply or external 12 V DC. The PTS50-15 is CE marked for sale within the EEC.

## Options

The PTS50-15 series can be modified upon special request to work at different frequencies than 15 MHz. For example the PTS50-5 accepts a 5 MHz input and has 5 MHz outputs. Refer to the relevant brochures for more information. Other options include 19" rack mount case and alarm relay outputs (relay activated on loss of input signal or AC/DC power).

### PTS50-15 SPECIFICATIONS

Specification Parameter	Specification	Comments
<b>Input</b>		
Frequency	15.000 MHz	
Bandwidth (-3 dB)	> ± 250 kHz	
Impedance	50 Ω	
Input VSWR	< 1.20 @ 15 MHz	
Input Level Range (15 MHz input)	+20 dBm to -10 dBm	Output Changes by < 0.4 dB
<b>Outputs 1 to 5</b>		
Output Waveform	Sinewave	50 Ω BNC Connector
Output Frequency	Same as the input frequency	
Output VSWR (50 Ω)	< 1.7:1 @ 15 MHz	
Output level (15 MHz input)	From 0 dBm to +12 dBm	Each output internal adjustable
Harmonic Distortion at 15 MHz	-70 dBc	Output set to +10 dBm
Jitter	< 2 ps rms	
Input to Output Isolation	> 100 dB	Typical
<b>Output 6</b>		
Output Waveform	Squarewave	Front Panel BNC Connector
Level	0 - 5V (open circuit) 0 - 2.7 V (50 Ω)	TTL Compatible
Frequency	15, 7.5, 3, 1.5 MHz, 150 kHz and 1.5 Hz	
Risetime	< 25 ns	At 1.5 MHz
Jitter (1 second, Allan Deviation)	< 2 ps rms	
<b>Output 7 (Slave Output)</b>		
Output Waveform	Sinewave	Rear Panel BNC Connector
<b>Phase Noise (Typical)</b>		
At 10 Hz Offset	-130 dBc/Hz	Measurement uncertainty ± 4 dB
<b>General</b>		
Power (AC)	115 VAC or 230 VAC ± 10%	15 Watts max
Power (DC)	11-13 VDC @ 0.7 Amps	
Size and weight	215 x 265 x 35 mm and 2.8 kg	Width x Depth x Height
Ambient Operating Temperature	-10°C to +50 °C	
<b>Options</b>		
Option 01	19" Rack Mount case	
Option 02	Traceable Calibration Certificate	Traceable to UKAS or NIST
Option 03	Alarm Relay Outputs	Activated if input signal/power is lost

<b>Precision Test Systems</b>		
<b>Head Office - UK</b>	<b>South Africa</b>	<b>USA</b>
Precision Test Systems LTD 40 Holkham Avenue, South Woodham Ferrers Essex, CM3 7AU, England Tel: +44 (0) 870 368 9608 Fax: +44 (0) 1245 330030 Email: uksales@ptsyst.com Web: www.ptsyst.com	Precision Test Systems cc Randburg Gauteng South Africa Fax: 08651 58198 Email: sasales@ptsyst.com Web: www.ptsyst.com	Precision Test Systems 14781 Memorial Drive, Suite # 981 Houston Texas, 77079, USA Tel: 1 888 876 4804 Fax: 1 832 201 6564 Email: usasales@ptsyst.com Web: www.ptsyst.com

Full specifications available from [www.ptsyst.com](http://www.ptsyst.com). Specifications and features subject to change without notice (290311)